



AGM 3" dykpumper



Model	Motor			Vandmængde m ³ /time								Varenr.	
	kW	HK	[A]	0,3	0,6	0,9	1,2	1,8	2,4	2,7			
T3-15	0,37	0,5		46	42	39	36	28	15	7			1220T315
T3-23	0,55	0,75		70	66	61	55	43	24	13			1220T323
T3-30	0,75	1		92	86	80	73	57	33	17			1220T330
T3-45	1,1	1,5		128	119	112	103	75	47	28			1220T345

■ = optimalt driftsområde.

Ydelseskurver:

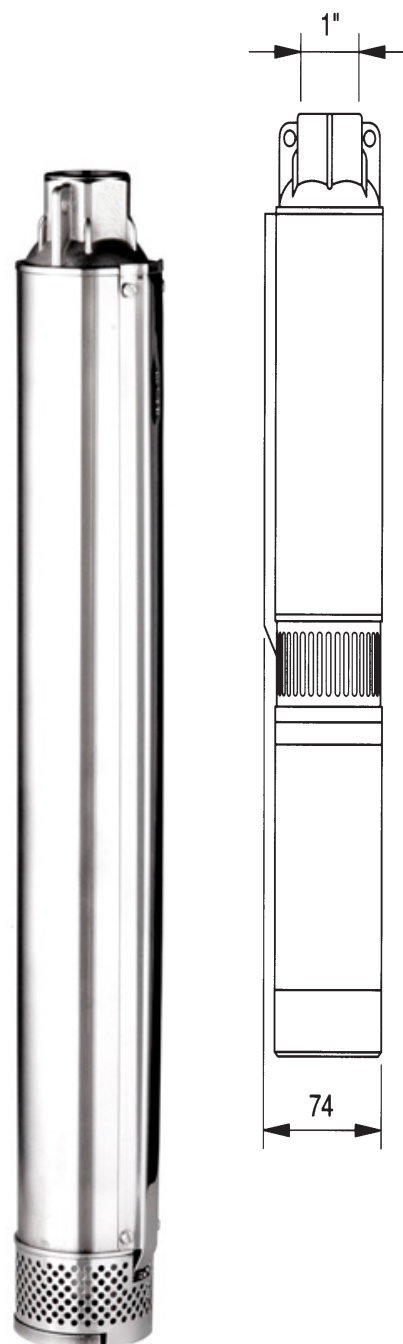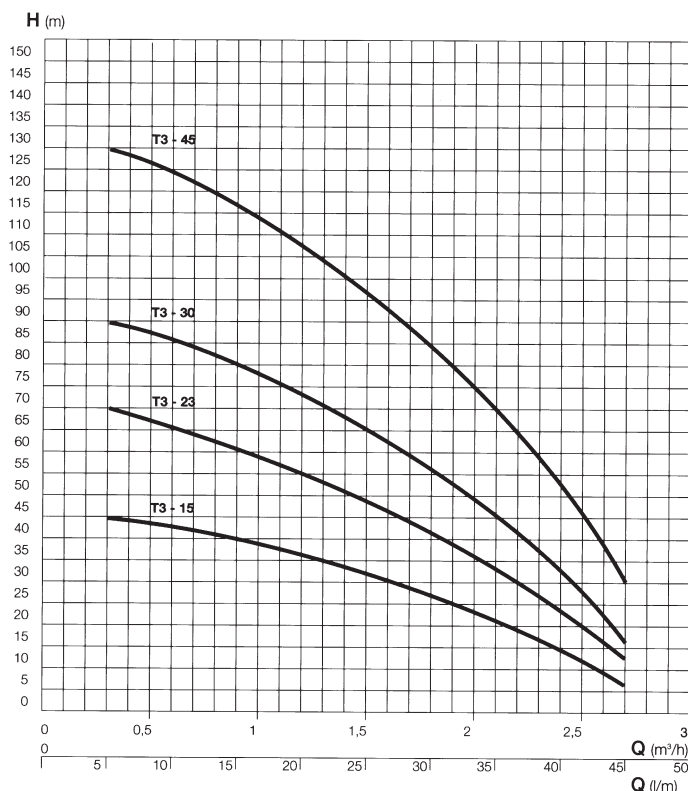

Tekniske data:

Motorkoblingsflange og afgangstuds i rustfrit stål.

Løbehjul i noryl.

Ledehjul i selvslemmende polyacetal.

Kappe, pumpeaksel, kobling, kabelskinne, sugesi samt skruer i rustfrit stål.

Indbygget kontraventil.

3x380 V.

Max. pumpe diameter 74 mm.

Motordata:

Model	kW	HK	I _N	I _{START}	rpm	COS	Ca/Cn	Thrust load
OPT 050	0,37	0,5	1,75	5	2800	0,70	2,1	1200 N
OPT 075	0,55	0,75	2,10	6,5	2810	0,76	2,0	
OPT 100	0,75	1	2,50	8	2810	0,77	2,0	
OPT 150	1,1	1,5	3,0	14,5	2820	0,76	2,0	

Motor kan på forespørgsel leveres som 1 x 230 V.